




GV-AS8110 IP Control Panel

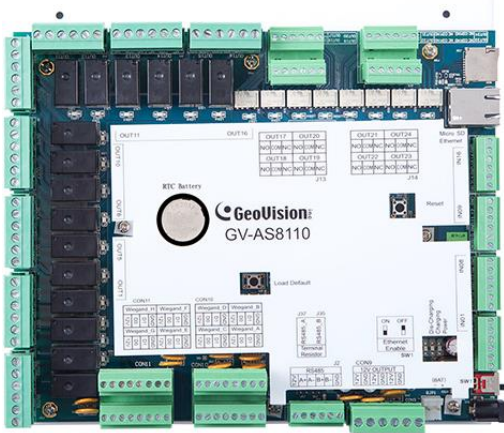

KEY FEATURES

- One-way control: 8 doors
- Two-way control:
 - 4 doors by Wiegand only;
 - 8 doors by RS-485 / network;
 - 8 doors with max 4 doors by Wiegand and other doors by RS-485 / network
- 8 Wiegand card readers of 26 to 64 bits
- 16 GV-Readers and GV-GF Fingerprint Readers through RS-485 and network
- Built-in 16 inputs and 24 relay outputs
- Suitable for controlling doors, parking gates and access to elevator call buttons
- Support for tampering alarm

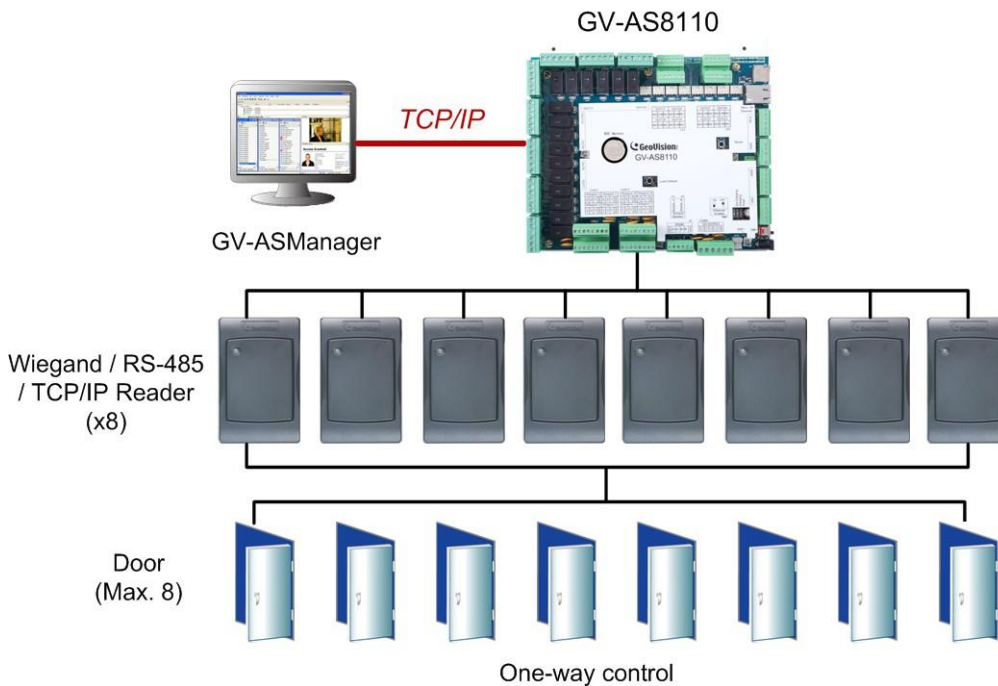

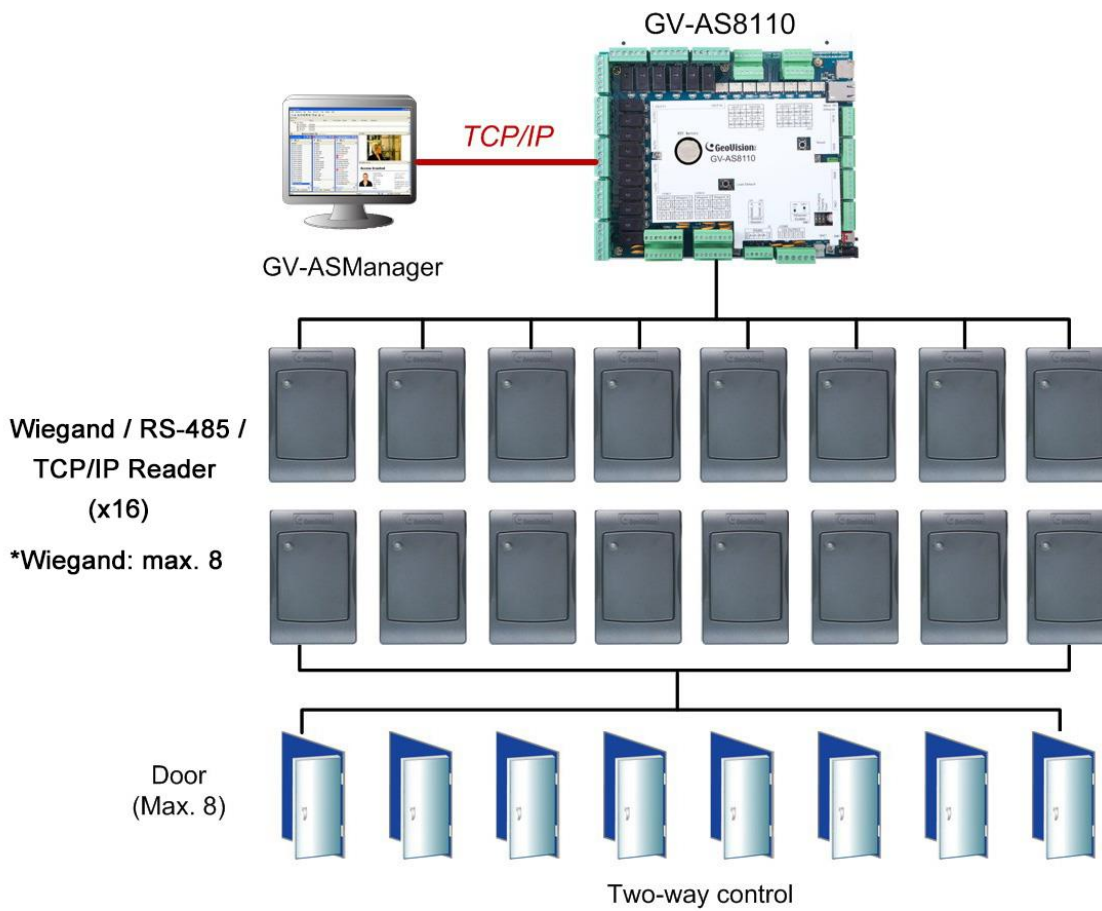

SPECIFICATIONS

| System Requirements | |
|------------------------|---|
| GV-ASManager Version | GV-ASManager V4.2.3 or later |
| Software | |
| One-Way Control | 8 doors |
| Two-Way Control | 4 doors by Wiegand only 8 doors by RS-485 / network 8 doors with max 4 doors by Wiegand and other doors by RS-485 / network |
| Hardware | |
| CPU | 32-bit ARM7TDMI |
| Number of User Cards | 100,000 cards |
| Event Buffer | 1,000,000 events and log data |
| Power | AC 100~250V , 50~60 Hz |
| RS-485 Interface | 2 RS-485 interfaces for GV-Readers and GV-GF Fingerprint Readers (max. 16 Readers) Distance 600 m (1968.50 ft), 24 AWG |
| Wiegand Interface | 8 Wiegand interfaces, 26~64 Bit format, distance 100 m (328.1 ft), 24 AWG 12V DC power supply, 200mA |
| TCP/IP Interface | 1 TCP/IP interface for GeoVision network readers |
| Communication | TCP/IP |
| Battery | Replaceable button cell |
| Input | 16 inputs, dry contact, NO/NC |
| Output | 24 relay outputs (30V DC, 3A; 110 ~ 250V AC, 3A) |
| Operating Temperature | 0 ~ 65 °C / 32 ~ 149 °F |
| Operating Humidity | 10% ~ 90% RH (non-condensing) |
| Dimensions (W x H x D) | 210 x 187 x 40 mm / 8.27 x 7.36 x 1.57 in |
| Weight | 900 g / 2 lb |
| Certification | CE, FCC, RoHS |

Note:

1. RS485 and TCP/IP interfaces only support GeoVision readers, while Wiegand interface supports both GeoVision and 3rd party readers (Wiegand 26~64 Bits).
2. GV-AS Controllers do not support 3rd party access control software.
3. Specifications are subject to change without notice.

Packing List

- GV-AS8110
- Power Adaptor 12V DC / 5A
- Power Cord
- Battery Cable
- Screw x 8
- Hex Nut x 8
- Hex Pillar x 8
- Micro SD Card 2 GB
- Software CD
- Warranty Card

Options

Optional devices can expand the capabilities and versatilities of your GV-AS Controllers. Consult your sales representative for more information.

| | |
|--------------------------------------|--|
| GV-AS ID Card / Key Fob & GV-UHF Tag | 125 KHz and 13.56 MHz cards / key fobs, 900 MHz UHF Tag are available. |
| GV-CR420 | GV-CR420 is a card reader with a built-in 4MP wide angle IP camera. The card reader recognizes identification cards and transmits live view through network connection. |
| GV-CR1320 | GV-CR1320 is a card reader with a built-in 2MP wide angle IP camera. The card reader recognizes identification cards and transmits live view through network connection. |
| GV-DFR1352 | GV-DFR1352 is a card reader that uses a 13.56 MHz frequency. The reader has both Wiegand and RS-485 outputs that can be connected to any standard access control panel. |
| GV-FWC | GV-FWC integrates GeoVision face-recognition-based cameras, software and readers into access control systems by sending access card data, paired to Face IDs, to controllers either through TCP/IP or Wiegand connection. |
| GV-FR2020 | GV-FR2020 is a 13.56 MHz face recognition reader. The reader supports various credentials for access control: Face, Card, Card + Face and Password + Face. |
| GV-GF Fingerprint Readers | GV-GF1921 / 1922 is a fingerprint reader, supporting three operation modes: Fingerprint Only, Fingerprint + Card and Card Only. Readers with optical and capacitance sensors are available. |
| GV-IB25 / 65 / 85 Infrared Button | The GV-IB25 / 65 / 85 Infrared Button detects infrared movement within 3 to 12 cm and allows you to open the door with a wave of hand. |
| GV-Reader 1251 | GV-Reader 1251 is a card reader that uses a 125 kHz frequency. The reader has both Wiegand and RS-485 outputs that can be connected to any standard access control panel. |
| GV-R1352 | GV-R1352 is a card reader that uses a 13.56 MHz frequency. The reader has both Wiegand and RS-485 outputs that can be connected to any standard access control panel. |
| GV-RK1352 | GV-RK1352 is a card reader with keypad that uses a 13.56 MHz frequency. The reader has both Wiegand and RS-485 outputs that can be connected to any standard access control panel. |
| GV-RU9003 | GV-RU9003 is a Radio Frequency Identification (RFID) reader of ISO 18000-6C (EPC GEN2) standard. Designed for parking lot management, the reader can read RFID tag within 10 m (32.8 ft). |
| GV-SR1251 | GV-SR1251 is a card reader that uses a 125 kHz frequency. It has both Wiegand and RS-485 outputs that can be connected to any standard access control panel. |
| GV-WTR | GV-WTR is a converter designed for converting Wiegand interface to RS-485 interface, and vice versa. It enables 3rd party readers to be connected to RS-485 GV-Controllers, as well as allowing GV-AI FR (software) and GV-RS1320 (RS-485 camera reader) to be connected to 3rd-party Wiegand controllers. |
| Cabinet (GV-AS Iron Box) | With the cabinet (Dimension: 383.5 x 443.5 x 112.2 mm / 15.1 x 17.5 x 4.4 in), GV-AS Controllers can be mounted directly to a wall or recessed into the wall. |
| Electric Lock | Three types of electric locks are available: electromagnetic lock, electric bolt and electric strike. |
| Push Button Switch | The push button switch can be integrated with any standard access control systems, allowing door exit by activating or deactivating the electric locking device. Both American standard and European standard push buttons are available. |